
Steel I-Beam Soft Stop 3 In. Length x 15 In. Width x 5 In. Height 3 In. to 12 In. Usable Yellow

MODEL IBSS-3-12

Overhead Lifting / I-Beam Soft Stop

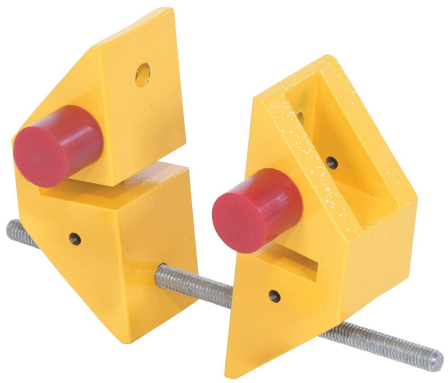

PRODUCT OVERVIEW

An I-beam soft stop prevents trolleys and items from passing through open ends of I-beams. With an adjustable design the stops can be placed at variable positions along the flange of the I-beam, preventing any possible damage. Built of steel, the stops are a worthwhile addition to the workplace, most notably for the safety of personnel. Due to its basic tension driven design, no mounting holes or permanent alterations are needed!

KEY FEATURES

- Minimizes trolley impact during movement
- Semi-permanent design
- Sold in pairs for complete I-beam protection
- Usable on I-beams widths of 3" to 12"


CORE PRODUCT DATA



ASSEMBLED WEIGHT **7 lbs**	ASSEMBLED SIZE **3" W x 13" L x 5" H**	SHIP WEIGHT **15 lbs**
PACKAGE 1 SIZE **5" W x 12" D x 5" H**	COLOR / FINISH **Yellow**	FREIGHT TYPE **Parcel**

AVAILABILITY Out of Stock - Please Contact Sales **QUICKSHIP: YES**

Products are sold through Vestil distributor partners. Contact a distributor for current pricing and ordering.

ADDITIONAL PRODUCT VIEWS



PRODUCT SPECIFICATIONS

Minimum Usable Length (in.)	3
Maximum Usable Length (in.)	12
Overall Width (in.)	2-3/4
Overall Length (in.)	13-1/2
Overall Height (in.)	4
Finish	Powder Coated
Max Usable I-Beam Flange Thickness (in.)	3/4
Maximum Usable Width (in.)	2

PRODUCT & SHIPPING REFERENCE

Shipping Point: **Angola, IN 46703**

Warranty: **90 Days**

AVAILABLE PRODUCT RESOURCES

SCAN FOR CURRENT PRODUCT DATA

Live product page: https://www.vestil.com/product.php?FID=1821