
Steel Adjustable Spreader Beam 78 In. Length 2,500 Lb. Capacity Blue

MODEL SBM-25

Overhead Lifting / Adjustable Spreader Beams

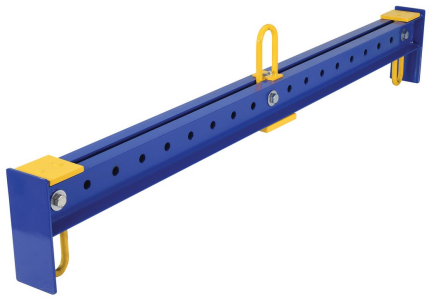

PRODUCT OVERVIEW

The adjustable spreader beam is ideal for the manufacturing and maintenance facilities. The steel construction keeps the unit durable and strong for a lifetime of use. The beam is shipped with a test certificate.

KEY FEATURES

- Designed to lift and move uneven and awkward loads
- Complies with ASME B30.20-1993 standards
- Includes two lower bails and one upper bail standard for added versatility
- Welded steel construction for heavy duty performance

CORE PRODUCT DATA


ASSEMBLED WEIGHT **119 lbs**	ASSEMBLED SIZE **5" W x 78" L x 16.5" H**	SHIP WEIGHT **178 lbs**
PACKAGE 1 SIZE **29" W x 92" D x 10" H**	COLOR / FINISH **Blue**	FREIGHT TYPE **LTL Palletized**

AVAILABILITY Available **QUICKSHIP: YES**

Products are sold through Vestil distributor partners. Contact a distributor for current pricing and ordering.

ADDITIONAL PRODUCT VIEWS







PRODUCT SPECIFICATIONS

Uniform Capacity (lb.)	2,500
Headroom (in.)	14-3/4
Minimum Spread (in.)	8
Maximum Spread (ft,)	6
Usable Upper Bail Width/Height (in)	2-1/2 x 4-1/2
Usable Lower Bail Width/Height (in.)	1-1/2 x 4-1/2
Upper/Lower Bail Thickness (in.)	3/4
ASME	B30.20-1993
C-Channel Height (in.)	5
Overall Width (in.)	5
Overall Height (in.)	16-1/2
Overall Length (in.)	78

PRODUCT & SHIPPING REFERENCE

Shipping Point: **Angola, IN 46703**

Warranty: **90 Days**

AVAILABLE PRODUCT RESOURCES

SCAN FOR CURRENT PRODUCT DATA

Live product page: https://www.vestil.com/product.php?EID=572